

HP-100 UNIT

Product Details:


- Standard UL approved 120 VAC models
- Pumps equipped with thermal overload protection




Max Flow (lpm)	100
Max Cont. Operating Max Pressure (PSI)	2.6
Power Consumption (watts)	100
Noise Level (dBa @ 1m.)	38
Weight (lb)	18.7

DIMENSIONS


[Unit: mm(inch)]

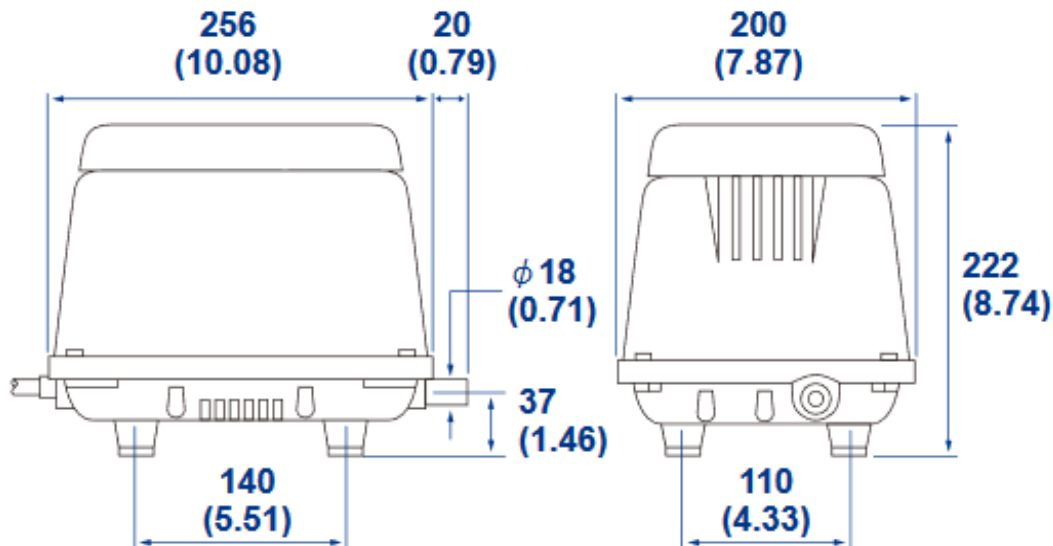

PERFORMANCE CURVES



HP-100

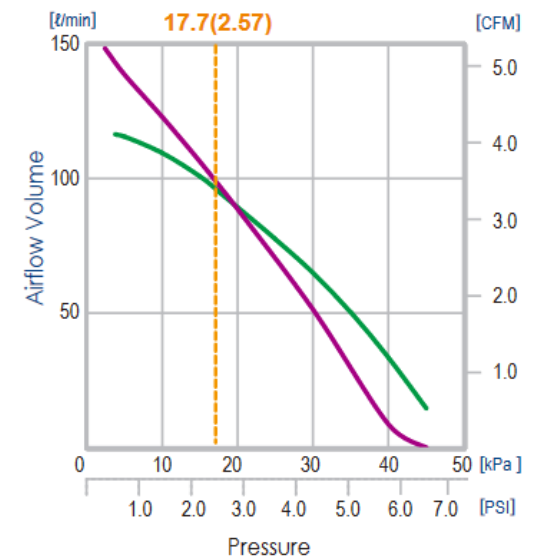

SPECIFICATIONS FOR HIBLOW HP-100 UNIT

- 4.2 cfm Open Flow
- 100 LPM (Liters Per Minute) @ 2.57 PSI
- 4.3 PSI Maximum Continuous Operating Pressure
- 120 VAC, 60 Hz, 1.9A, 75 Watts
- 42 dBA Measured @ 1 Meter
- Dimensions: 10.1" L x 7.9" H x 8.8" H
- Condition: NEW
- Includes Rubber 90 with Hose Clamps
- Includes 1/8" Alarm Connection Fitting

