

XP-80 UNIT

Product Details:


- Available with integral low-pressure alarms for 120 VAC applications
- Standard UL approved 120 VAC models and 230 VAC CE compliant models available
- Pumps equipped with thermal overload protection
- Includes pressure tap location for external Alarm sensor




Max Flow (lpm)	80
Max Cont. Operating Max Pressure (PSI)	2.1
Power Consumption (watts)	58
Noise Level (dBa @ 1m.)	36
Weight (lb)	9.5

DIMENSIONS

[Unit: mm(inch)]

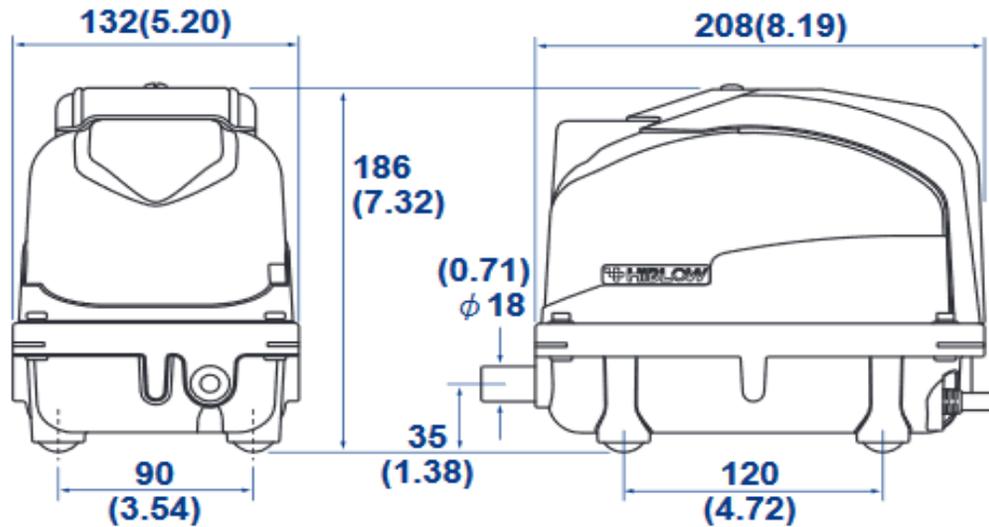

PERFORMANCE CURVES

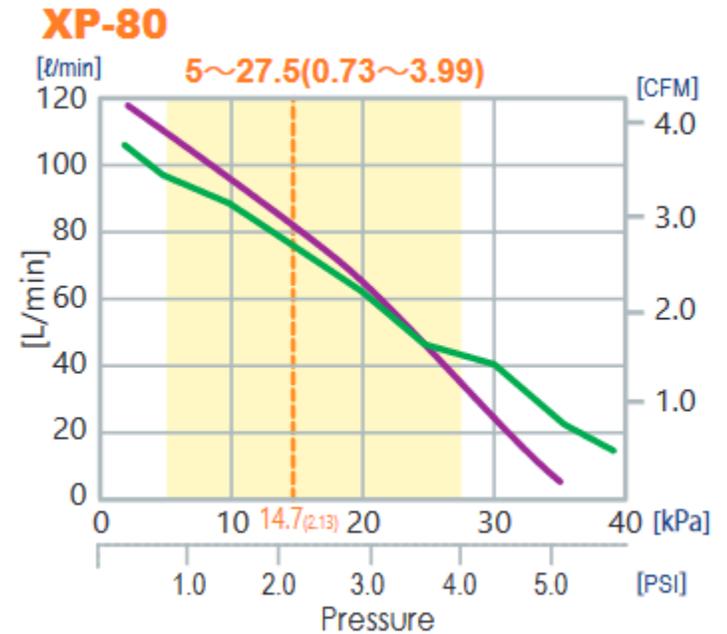

SPECIFICATIONS FOR XP-80 UNIT

- 3.7 cfm (cubic feet per minute) Maximum Air Flow (@ 0 PSI)
- 80 LPM (Liters Per Minute) @ 2.13 PSI
- Recommended Operating Pressure Range: 0.73 – 3.99 PSI
- 120 VAC, 60 Hz, 0.9A, 58 Watts
- 36 dBA Measured @ 1 Meter
- Dimensions: 8.19" L x 5.2" W x 7.32" H
- Condition: NEW
- Includes Rubber 90 with Hose Clamps
- Includes 1/8" Brass Alarm Connection Fitting
- Fits Many 500 and 600 GPD Aerobic Treatment Systems (Sizing is Determined By Brand of Aerobic System)

